

شركة مصافي الجنوب/ شركة عامه

WWW.SRC.GOV.IQ


SOUTH REFINERIES COMPANY IS ANNOUNCING THE ISSUANCE OF HEREUNDER REQUISITION . ACCORDINGLY WHOSOEVER WOULD LIKE TO PARTICIPATE AND OFFER SHOULD ATTEND SRC / HEADQUARTER LOCATED IN BASRAH/ SHUAIBA.

GAINING TENDER SPECIFICATIONS FOR AN AMOUNT MENTIONED AGAINST EACH TENDER CASH IN ADVANCE IT IS NON REFUNDABLE WHATEVER REASONS AND WHO WINS THE TENDER SHALL PAY THE COSTS OF LAST ANNOUNCEMENT.THE WELL KNOWN INTERNATIONAL COMPANIES WHICH HAVE NO BRANCH OR REPRESENTATIVE IN IRAQ CAN PARTICIPATE AND SEND THEIR OFFERS THROUGH DHL OR FEDEX OR ANY OTHER WAY WITHIN TIME DECIDED WITHOUT ATTACHING THE BILL OF PURCHASING BIDDING DOCUMENTS.

CLOSING DATE WILL BE UNTIL THE END OF OFFICIAL WORKING HOURS OF MONDAY DECEMBER / 10 /2012.

ITEM	REQ NO	DESCRIPTION	PRICE
1-	45/2012/E	Pneumatic Level Indicating Transmitter and Controller	\$100
2-	46/2012/E	Chemical Materials Chemic 3164 50 Ton Chemic 7279 15 Ton	\$100

Please, see attached conditions

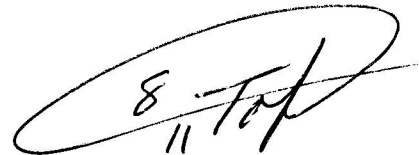

FOR/ DIRECTOR GENERAL
Akeel SH. Ahmed

TAWFIK .A .BADEE

Req no. 45 /2012/E

Pneumatic Level Indicating Transmitter and controller

Requirements:

1. Supplying (3+3) nos. of Pneumatic Indicating Level Transmitters and controller according to attached sheets.
2. Two year recommended spare parts for each item (Torque tube, Torque tube rod, Relay, Gasket...
3. Three sets of documents.
4. One year guarantee.

Note:

- All pneumatic Indicating Level Transmitters and controller must be assembling with air filter regulator & gauges.
- Pneumatic Connection must be st. steel.

Manufacturer: Yamatake, Fisher, Foxboro.

Origin: Japan, USA, European committee, China.

1- Pneumatic Level Indicating Transmitter (Displacer type): Qty/3

Specifications

- Supply: 1.4 kg /cm².
- Output: 0.2-1kgf/cm².
- Accuracy: +/- 1%.
- Vent / Drain connection: plug / 1/2" valve.
- Action: Direct or Reverse adjustable.
- Ambient temperature: 85°C.
- Air piping connection: 1/4" NPT.

Item	Tag no	Service	Range mm	Transmitter mounting	Chamber		Hanger Ext. mm	Float Dia. mm	Material			Service condition			
					Conn. style	Conn.			Chamber	Displacer or Float	Torque Tube	Liquid	Max Press. kgf/cm ²	Max Temp. °C	Density Kg/cm ²
1	LIC-881T	S/O over head tank level for compressor 801JT	800	Right	Internal chamber: Top vessel mounting	4"x300 RF	672.5	45	CS	s.st 316	Hastelloy B	Seal oil	20	80	750
2	LIC-813T	Condensate drum 813F for compressor 801JT	500	Right	External chamber: side-side	2"x150 RF	-	STD	CS	s.st 316	s.st316	Water	3	143	990
3	LA-1T	3510-1F	700	Left	External chamber: side-side	2"x150 RF	-	STD	CS	s.st 316	s.st316	H.C	5	55	780

2- Pneumatic indicating controller (Local): Qty/3

Specifications

- Supply: 1.4kgf/cm².
- Input: 0.2-1kgf/cm².
- Output: 0.2-1kgf/cm².
- Accuracy: +/- 1%.
- Ambient temperature: 85 °C.
- Air piping connection: 1/4" NPT.
- Measuring range: 100%.
- Action: Direct or Reverse adjustable.
- Process variable (red), set point pointers (green) & mounting bracket on pipe 2" universal included.
- Control mode: P+I.
- Element /body material: Brass/Aluminum.
- Process condition: Fluid: air. /Temp: 49°C.
- Tag names: LIC-881,LIC-813 & LIC-1